



## ACRIFIX® TC 0030

### Разбавитель/очиститель

#### Product and Use

##### Type of service product

Methyl methacrylate; clear transparent, highly fluid.

##### Application

Thinner and cleaner for all polymerization adhesives.

#### Storage/Transport

Keep container tightly closed in a cool place.  
UN 1247

#### Working Instructions

The viscosity of the adhesives is adjusted so as to allow their direct use in most cases. However, for certain applications it is helpful to dilute the adhesives beforehand, i.e. to reduce their viscosity:

- More rapid degassing because air bubbles rise to the surface quicker in diluted adhesive – advantageous for large quantities of adhesive composition.
- Better leveling, thinner adhesive layers and somewhat delayed skin formation – advantageous for bonding large surfaces (particularly of thin sheets).
- Better wetting out and degassing when embedding fiber mats and woven fabrics.
- More rapid filling of butt joints between thick blocks.
- Diluted adhesives enable shorter pot lives and polymerization times (at higher hardener concentration), because degassing and processing can be performed more quickly than with undiluted polymerization adhesives.

The viscosity required for a specific application must be determined by trial and error. In general, adhesives should be diluted as little as possible; the maximal addition of ACRIFIX® TC 0030 should be 10%; for thinners of >10%, ACRIFIX® TH 0032 should be used for ACRIFIX® 2R adhesives.

The hardener concentration (e.g. ACRIFIX® CA 0020) depends on the quantity of diluted adhesive.

The influence of the thinner on viscosity and polymerization can be seen in the corresponding pictures.


#### More Information

ACRIFIX® TC 0030 is well-suited **for degreasing PLEXIGLAS® surfaces prior to bonding**. These are best wiped down with a piece of washed glove lining fabric or uncolored kitchen roll towel soaked with ACRIFIX® TC 0030.

Polymerization shrinkage increases with higher thinning. In case of strong thinning, surface structures may occur after curing.

Avoid cleaning of PLEXIGLAS® Resist versions with ACRIFIX® – risk of wipe marks; rather clean with petrol ether or isopropanol.

For more information see our Guideline “Joining, Ref. No. 311-3”.

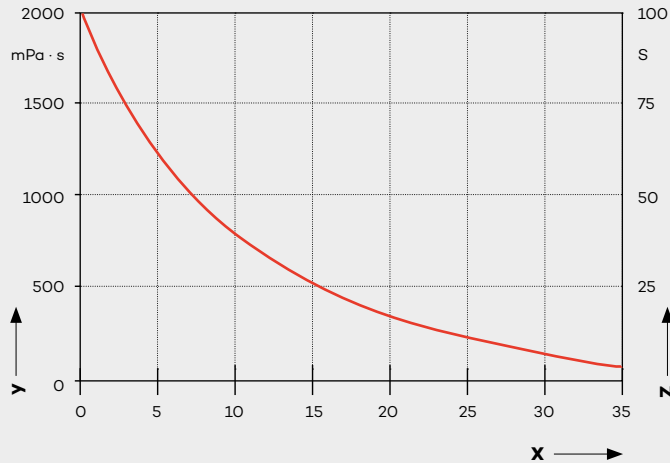

Viscosity of ACRIFIX® 2R 0190

X = Thinner concentration


Y = Viscosity

Z = Efflux time/6mm cup

## Limitation of Liability

Our ACRIFIX® adhesives and other service products were developed exclusively for use with our PLEXIGLAS® products and are specially adjusted to the properties of these materials. Any recommendations and guidelines for workshop practice therefore refer exclusively to these products.

Claims for damages, especially under product liability laws, are ruled out if made in connection with the use of products from other manufacturers.

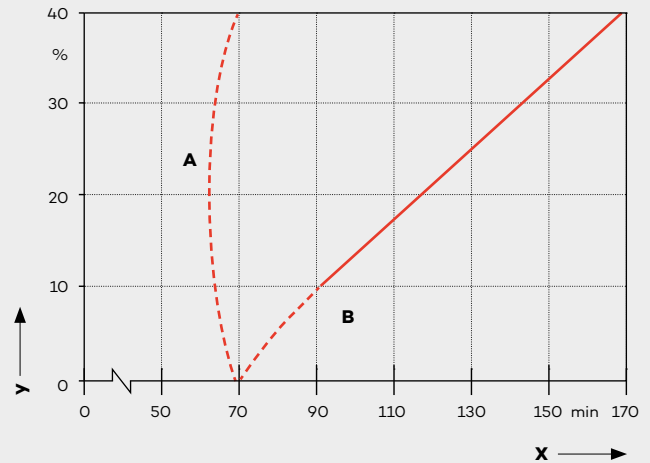

Influence of thinner concentration on polymerization time of ACRIFIX® 2R 0190 + 3% ACRIFIX® CA 0020 (on diluted adhesive)

X = Polymerization time

Y = Thinner-concentrate

A = ACRIFIX® TH 0032

B = ACRIFIX® TC 0030

## Safety Measures and Health Protection

For further information on safety measures, the exclusion of health risks when handling adhesives and on their disposal, see our Safety Data Sheet.

Availability according to the current sales range.

### Typical Values

Properties	Values
Viscosity; Brookfield A/60/20°C	~0,6 mPa · s
Density (20 °C)	~ 0,94 g/cm <sup>3</sup>
Refractive index n <sub>D</sub> <sup>20</sup>	~ 1,415
Color	clear transparent
Flash point (DIN 51755)	~ + 10 °C
Explosion limits in air	2,1 to 12,5 Vol. %
Storage stability	2 years after filling, if correctly stored
Storage temperature	max. 30°C
Packaging materials	aluminum and colored glass

**Röhm GmbH**  
 Riedbahnstraße 70  
 64331 Weiterstadt  
 Germany  
[www.plexiglas.de](http://www.plexiglas.de)  
[www.roehm.com](http://www.roehm.com)

**СС Прожект Групп**  
 Москва, Ильинка 4  
[www.acrifix.ru](http://www.acrifix.ru)  
[www.dukeacylic.ru](http://www.dukeacylic.ru)  
 8 800 7777 439

® = registered trademark

PLEXIGLAS and ACRIFIX are registered trademarks of Röhm GmbH, Darmstadt, Germany.  
 Certified to DIN EN ISO 9001 (Quality) and DIN EN ISO 14001 (Environment)

This information and all further technical advice is based on our present knowledge and experience. However, it implies no liability or other legal responsibility on our part, including with regard to existing third party intellectual property rights, especially patent rights. In particular, no warranty, whether express or implied, or guarantee of product properties in the legal sense is intended or implied. We reserve the right to make any changes according to technological progress or further developments.

The customer is not released from the obligation to conduct careful inspection and testing of incoming goods. Performance of the product described herein should be verified by testing, which should be carried out only by qualified experts in the sole responsibility of a customer. Reference to trade names used by other companies is neither a recommendation, nor does it imply that similar products could not be used.